
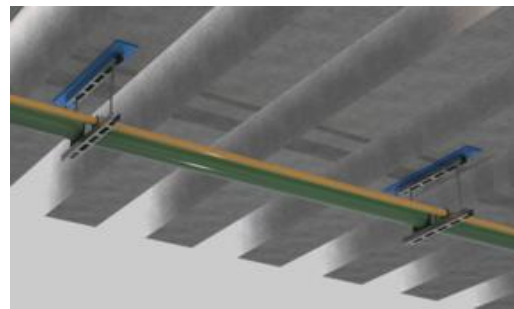


SEMICONDUCTOR CLEANROOM M.E.P UNIVERSAL MOUNTING SYSTEM

MECHANICAL/ELECTRICAL/PLUMBING PEDESTAL SYSTEM™



Providing the Competitive Edge Through Improved Vibration Isolation.
Patented Solid Composite Vibration Isolation Plate improves vibration isolation, amplitude reduction, and vibration regularization.

Different MEP Contractors may use dissimilar means and methods to secure MEP tool hook-up Lines.

- ❖ A unified system avoids situations of dissimilar MEP Lines underneath the elevated Cleanroom flooring.


Mechanical, Electrical, Plumbing Universal Mounting System

Coated with a high performance, high solids two component, exterior/interior, low VOC, polyester aliphatic urethane coating. Provides excellent chemical resistance and color retention.

Low Profile Floor Mount
MEP LPF-C
Base 3" Wide x 2" Height - 3/8" Plate




Part #	Length	U-Joint
LPF-C-12	12"	8"
LPF-C-16	16"	12"
LPF-C-20	20"	16"
LPF-C-24	24"	20"

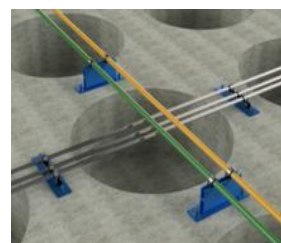

Low Profile Floor Mount, Double Stack
MEP LPF-3/8-CDBL
Base 3" Wide - 3/8" Plate




Part #	Length	U-Joint	Height
LPF-CDBL-12	12"	8"	3-1/4"
LPF-CDBL-16	16"	12"	2-3/4"
LPF-CDBL-20	20"	16"	6-1/2"
LPF-CDBL-24	24"	20"	4-7/8"

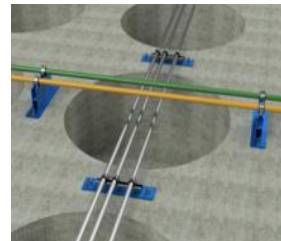

Low Profile Ceiling Mount
MEP LPF-U
Base 3" Wide x 2" Height - 3/8" Plate



Part #	Length	U-Joint
LPF-U-12	12"	8"
LPF-U-16	16"	12"
LPF-U-20	20"	16"
LPF-U-24	24"	20"

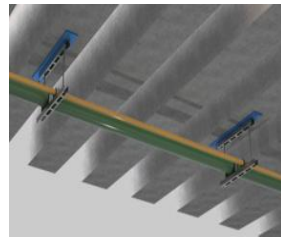

Low Profile Floor Mount Pedestal
Waffle Span - MEP
WLPF-3C
Base 5 1/2" Wide - 3/8" Plate



Part #	Length	U-Joint
WLPF-3C-21	21"	17"
WLPF-3C-25	25"	21"
WLPF-3C-28	28"	24"
WLPF-3C-30	30"	26"
WLPF-3C-40	40"	36"
WLPF-3C-46	46"	46"
WLPF-3C-50	50"	46"



Mechanical, Electrical, Plumbing Alternative Configurations

- ❖ *Braced Heavy Duty Pedestal available for extra strength.*
- ❖ *Low Profile Floor Mount Pedestals available to fit in smaller spaces.*



Low Profile Floor Mount Adjustable Pedestal
MEP LP FLR-T2S
 Base 3" Wide – 3/8" Plate
 Shown in Twin Configuration with U-Channel Bridge



Part #	Height	U-Joint
LPFLR-T2S-US-8	8"	12"
LPFLR-T2S-US-10	10"	21"
LPFLR-T2S-US-12	12"	24"



Upright Floor Mount Pedestal - HSS4"x4", HSS 3"x3"
MEP FLR-T4S
 Base 8"x8" – 1/2" Plate



Part #	Length	U-Joint
FLR-T3S-25	25"	20-1/2"
FLR-T3S-29	29"	24-1/2"



Part #	Length	U-Joint
FLR-T3S-16	16"	11-1/2"
FLR-T3S-19	19"	14-1/2"
FLR-T3S-22	22"	17-1/2"

Wall Mount or Upright Braced - HSS3x3
MEP WAL-T3S-L
 Base 8"x8" – 1/2" Plate



Part #	Length	U-Joint
WAL-T3S-L28	28"	23-1/2"
WAL-T3S-L32	32"	27-1/2"
WAL-T3S-L36	36"	31-1/2"



Wall Mount or Upright Free Hanging - HSS3x3
MEP WAL-T3S
 Base 8"x14" – 1/2" Plate



Part #	Length	U-Joint
WAL-T3S-16	16"	11-1/2"
WAL-T3S-19	19"	14-1/2"
WAL-T3S-22	22"	17-1/2"



Experience & Knowledge



We have fabricated and installed over 1,000 tool pedestals / pads

Vibration Isolation Performance varies per Load

SK Commercial Construction Introduces the
NxGeneration Tool Pedestal System
For Additional Models & Configurations,
please visit: www.nxgeneration.com.

CONTACT

Office: (254) 200-1170

contact@nxgeneration.com

www.nxgeneration.com

OUR GOAL



Reduced Labor Time

Pre-Assembled Tool Pedestals, featuring
U-Channel for Universal Connection



Efficiency

Could your Production Yield increase with
lowering Fabrication Area vibration?



Standardization

Uniform MEP Lines Throughout your facility



**Patented Passive Vibration
Isolation**

Solid Composite Vibration Isolation Plate
between Connection improves vibration
isolation, amplitude reduction, and vibration
regularization